

BE7400 SD H.264 or AVS Multichannel Encoder

The Telairity BE7400 is a scalable, fully programmable, low latency broadcast quality multichannel encoder for standard definition video formats. It uses state-of-the-art compression technology (either H.264/AVC or AVS) to achieve more than twice the compression efficiency of the older MPEG-2 standard. The high-density multichannel BE7400 encoding platform addresses the needs of IPTV providers and other customers for quality SD images in as little as 1 Mbps at a highly affordable per-channel price. Like all Telairity encoders, it can be easily upgraded via software to add new or improved features and enhance performance.



Features and Options

Video Encoding Features

- 2 to 4 fully independent channels with I/O per channel pair (1 & 2, 3 & 4)
 - SDI input with option of outputs: dual DVB-ASI, dual IP, or 1 each
 - Composite or Component input with dual IP output
- H.264/AVC - Main Profile, Level 3; or AVS-P2
- Input Video Formats: 576i (PAL), 480i (NTSC)
- Output Horizontal Resolutions: 720, 640, 544, 480, 352, 240/288 (CIF)
- Rate Control – 1.0 to 8.0 Mbps
 - Constant Bit Rate (CBR), Variable Bit Rate (VBR)
- Scene change detection
- Entropy Coding: CABAC or CAVLC per AVC or AVS profiles
- Adjustable Spatial Preprocessing and Deblocking (Loop) Filters

Audio Encoding Features (per channel)

- SD-SDI embedded audio input – per SMPTE 272M
 - Four programs (stereo pairs) per channel: Stereo, Dual Mono, Mono
- MPEG-1 Layer 2 encoding, bit rates: 32 to 384 Kbps
 - MPEG-4 AAC – LC option for better quality at lower bit rates
- Dolby Digital (AC-3) pass-through

Control Features

- On-board Flash memory for fast program upload at boot
- Web browser control via Ethernet interface

Output (maximum of 2 per channel)

- MPEG-2 transport stream over DVB-ASI 75 ohm coax (1 or 2/channel)
- IP Transport stream with TOS over 10/100 Base-T (1 or 2/channel)

BE7400 Multichannel SD AVC/AVS Encoder

Applications

The Telairity BE7400 SD encoder platform offers state of the art AVC or AVS video compression for standard definition television formats in a dense and cost effective 1 RU form factor. Applications include:

- IPTV
- Live Streaming
- Surveillance / Monitoring
- Broadcast Distribution
 - Satellite / Cable / Terrestrial

Benefits

Compact 1RU system for broadcast quality video encoding

Handles up to 4 fully independent SD channels, with up to 4 stereo audio programs per video channel

Based on the fully programmable Telairity-1 video architecture; easy software upgrades to improve quality, lower bit rates, add new options, and convert between AVC or AVS codecs

MPEG-4 AAC-LC option for high audio quality at very low compressed bit rates; Dolby Digital (AC-3) pass-through also supported

“Instant on” two-second startup times

Non-stop design includes dual redundant power supplies. Price includes Telairity unconditional one year service guarantee

Models

BE7400-2 – Two-channel system

BE7400-4 – Four-channel system

Single channel available in

BE7110

1U x 19" x 18" with front panel control

Ordering Information

Part Numbers:

BE7400-2, BE7400-4

Contents

- BE7000-series Encoding Platform
- Power Cable: IEC to USA plug; optional Euro plug
- USB flash drive with backup copy of encoder firmware and manual

Requirements

- Web browser control system
- SDI input source video
 - SD SMPTE 259M
- Input cables
 - 75 Ohm coaxial with BNC connector
- Output cables (either or both)
 - 75 Ohm coaxial with BNC connector
 - Cat5/6 Ethernet with RJ-45 connector

About Telairity

Telairity, based in Santa Clara, California designs, manufactures and markets H.264/AVC and other advanced encoding and transcoding solutions for broadcast and professional video applications. Telairity's breakthrough video architecture (Telairity-1™) is the powerful foundation for its real time encoding products which provide outstanding video quality and state-of-the-art video compression to achieve the lowest possible bit rates.

Telairity

3375 Scott Blvd., Suite 300
 Santa Clara, CA 95054
 tel 408 764 0270
 fax 408 764 0271
 www.telairity.com

Video Inputs (maximum of 1 per channel)

Input Format: 0, 2, 4 SD-SDI (SMPTE 259M) inputs
 0, 2, 4 Composite or Component (YPbPr) analog inputs

Video Input Formats: 4:2:2 (YCbCr): 576i (PAL), 480i (NTSC)

Frame Rates: 30, 29.97, 25, 24, 23.98 frames per second

Video In: Digital: 1 BNC/channel for 75 ohm coax
 Analog: 3 BNC/channel with adaptors for RCA YPbPr

SDI Loop Out: Matching output BNC per SDI input (only)

Audio Input

Input Format: Embedded in SD-SDI per SMPTE 272M
 Dolby Digital (AC-3) pass-through

External Audio: 2 digital AES + 2 analog L/R stereo pairs per channel (cables optional)

Compressed A/V Output

Output Interface: Digital Video Broadcast – Asynchronous Serial Interfaces (DVB-ASI), 270Mbps, buffered non-inverting
 10/100 Base-T Ethernet for IP

Packet Format: MPEG-2 188-byte Transport Stream (TS) packets in either TS/UDP/IP or TS/RTP/UDP/IP format with optional FEC

Compression Format: H.264 Main Profile, Level 3; or AVS-P2

Compressed Bitrates: User programmable, CBR or VBR, 1 to 8 Mbps/channel

ASI Stream Out: Twist-lock BNC connectors (0, 1, 2 per channel)

IP Stream Out: RJ-45 connectors (0, 1, 2 per channel)

Control

Interface: 1 Ethernet control interface per channel with RJ-45 connector via hub (or switch) to Web browser controller

Control Application: Web browser Interface over Ethernet

SNMP: Reporting Agent (option)

Power Specifications

Input voltage: 100 to 240 VAC (Auto sensing)

Line frequency, Power: 47 to 63 Hz; 61 Watts/channel


Mechanical Specifications

Dimensions & Weight: 1RU (H) x 19" (W) x 28" (D) rack mountable, 25 lbs.

Environmental Specifications

Cooling: Forced air-cooling side to side

Operating Temperature: -10° to 55°C

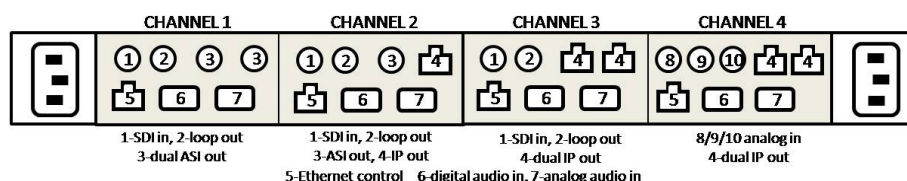

BE7400 Back Panel – I/O Configuration Options – Dual-redundant Power Supplies

Copyright 2010 by Telairity. All rights reserved. All products mentioned here are the trademarks or registered trademarks of their respective owners. Telairity reserves the right to make changes without notice and does not assume any liability arising from the application of this product.